

# Aircraft Accident Prevention: Loss-of-Control Analysis

Harry G. Kwatny <sup>\*</sup>, Jean-Etienne T. Dongmo <sup>†</sup> and Bor-Chin Chang <sup>‡</sup>

*Drexel University, 3141, Chestnut Street, Philadelphia, PA, 19104.*

Gaurav Bajpai <sup>§</sup> and Murat Yasar <sup>¶</sup>

*Techno-Sciences, Inc., 11750 Beltsville Road, Beltsville, MD, 20705.*

Christine Belcastro <sup>||</sup>

*NASA Langley Research Center, MS 161, Hampton, VA, 23681.*

The majority of fatal aircraft accidents are associated with ‘loss-of-control’. Yet the notion of loss-of-control is not well-defined in terms suitable for rigorous control systems analysis. Loss-of-control is generally associated with flight outside of the normal flight envelope, with nonlinear influences, and with an inability of the pilot to control the aircraft. The two primary sources of nonlinearity are the intrinsic nonlinear dynamics of the aircraft and the state and control constraints within which the aircraft must operate. In this paper we examine how these nonlinearities affect the ability to control the aircraft and how they may contribute to loss-of-control. Examples are provided using NASA’s Generic Transport Model.

## Nomenclature

$x$	State vector
$y$	Measurements
$z$	Regulated variables
$\mu$	Bifurcation parameter
$u$	Control inputs
$\alpha$	Angle of attack, rad
$\beta$	Side slip angle, rad
$V$	Velocity, ft/s
$X$	x inertial coordinate, ft
$Y$	y inertial coordinate, ft
$Z$	z inertial coordinate, ft
$p$	x body-axis angular velocity component, rad
$q$	y body-axis angular velocity component, rad
$r$	z body-axis angular velocity component, rad
$u$	x body-axis translational velocity component, ft/s
$v$	y body-axis translational velocity component, ft/s
$w$	z body-axis translational velocity component, ft/s
$\phi$	Euler roll angle, rad
$\theta$	Euler pitch angle, rad
$\psi$	Euler yaw angle, rad
$\Psi$	Heading, rad
$\gamma$	Flight path angle, rad

---

<sup>\*</sup>S. Herbert Raynes Professor

<sup>†</sup>Graduate Student

<sup>‡</sup>Professor, AIAA Member

<sup>§</sup>Director, Dynamics and Control, AIAA Member

<sup>¶</sup>Research Engineer

<sup>||</sup>Senior Research Engineer, Senior AIAA Member.

$A$	System matrix of a linear system
$B$	Control matrix of a linear system
$C$	Output matrix of a linear system
$J$	Jacobian matrix of a multivariable vector function
$\lambda, \tilde{\mathbf{v}}$	Eigenvalue and eigenvector of the Jacobian matrix $J$
$T$	Thrust, lb
$\delta_e$	elevator input, rad
$\delta_a$	Aileron input, rad
$\delta_r$	Rudder input, rad
$\mathcal{C}$	envelope
$\mathcal{S}$	safe set

## I. Introduction

RECENT published data shows that during the ten year period 1997-2006, 59% of fatal aircraft accidents were associated with *Loss-of-Control* (LOC).<sup>1</sup> Yet the notion of loss-of-control is not well-defined in terms suitable for rigorous control systems analysis. The importance of LOC is emphasized in<sup>2</sup> where the inadequacy of current definitions is also noted. On the other hand, flight trajectories have been successfully analyzed in terms of a set of five two-parameter envelopes to classify aircraft incidents as LOC.<sup>3</sup> As noted in that work, LOC is ordinarily associated with flight outside of the normal flight envelope, with nonlinear behaviors, and with an inability of the pilot to control the aircraft. These results provide a means for analyzing accident data to establish whether or not the accident should be classified as LOC. Moreover, they help identify when the initial upset occurred, and when control was lost. The analysis also suggests which variables were involved, thereby providing clues as to the underlying mechanism of upset. However, it does not provide direct links to the flight mechanics of the aircraft, so it cannot be used proactively to identify weaknesses or limitations in the aircraft or its control systems. Moreover, it does not explain how departures from controlled flight occur. In particular, we would like to know how environmental conditions (like icing) or faults (like a jammed surface or structural damage) impact the vulnerability of the aircraft to LOC.

LOC is essentially connected to the nonlinearity of the flight control problem. Nonlinearity arises in two ways: 1) the intrinsic nonlinearity of the aircraft dynamics, and 2) through state and control constraints. In this paper we consider control issues that arise from both sources.

First, we examine the implications of the nonlinear aircraft dynamics. Bifurcation analysis is used to study aircraft control properties and how they change with the flight condition and parameters of the aircraft. The paper extends results previously introduced by the authors in.<sup>4,5</sup> There we showed that the ability to regulate a system was lost at points associated with bifurcation of the trim equations; ordinarily indicating stall in an aircraft. Such a bifurcation point is always associated with a degeneracy of the zero structure of the system linearization at the bifurcation point. Such degeneracies include loss of (linear) controllability or observability, redundant controls (rank degeneracy of the B matrix) and/or redundant outputs (rank degeneracy of the C matrix). As such points are approached, the ability to regulate degrades so that the performance of the regulator (or pilot) may deteriorate before the bifurcation point is actually reached. The equilibrium surface or set of trim conditions is a submanifold of the state-parameter space that is divided into open sets by the bifurcation points. Within each region a linear regulator can be designed. However, a regulator designed in one region will fail if applied in a neighboring region.<sup>6</sup>

Second, we consider how state and control constraints relate to LOC. Recall that the Commercial Aircraft Safety Team (CAST) defines in-flight LOC as a *significant deviation of the aircraft from the intended flight path or operational envelope*.<sup>7</sup> The flight envelope represents a set of state constraints, so we consider the control issues associated with preventing departure from the constraint set. To do so, we use the notion of a *safe set*<sup>8</sup> or *viable set*.<sup>9</sup> Suppose an acceptable operating envelope is specified as a domain  $\mathcal{C}$  in the state space. The safe set  $\mathcal{S}$  is the largest positively control-invariant set contained in  $\mathcal{C}$ . Consequently, for any initial state in  $\mathcal{S}$  there exists a control that keeps the trajectory within  $\mathcal{S}$ . On the other hand for an initial state in  $\mathcal{C}$  but not in  $\mathcal{S}$ , there is no admissible control that will keep the trajectory in  $\mathcal{C}$ , the acceptable region. Thus, transitions out of  $\mathcal{S}$  will require a restoration control that necessarily includes some period of time outside of  $\mathcal{C}$ .

This paper will discuss LOC in terms of controllability/observability, bifurcation analysis, and safe sets

analysis. The inter-relationships between these attributes and their relationship to aircraft LOC will be discussed. Investigating LOC requires the use of aircraft dynamical models that are accurate outside of the normal flight envelope. In particular it is necessary to characterize post stall and spin behaviors that are often associated with LOC events. Until recently, such models were not available for large transport aircraft. Recent and ongoing work at the NASA Langley Research Center has focused on building aerodynamic models adequate for simulation and analysis in these regimes.<sup>10,11</sup> A central element in this effort is NASA's Generic Transport Model (GTM)<sup>12</sup> – a 5.5 % dynamically scaled commercial transport model. The GTM will be used to provide analysis examples.

In Section II we provide a short discussion of the LOC problem and in Section III we briefly describe the Generic Transport Model (GTM). Section IV addresses the bifurcation analysis of controlled dynamical systems. Among other things we specifically address control issues that arise near stall. We illustrate uncontrolled departures of the GTM near stall and give some first illustrations of recovery from post departure states. In Section V we consider difficulties associated with remaining within a specified flight envelope when control authority is limited. Finally, in Section VI we summarize our results.

## II. The Loss-of-Control Problem

Although the majority of fatal aircraft crashes over the past decade or so have been attributed to LOC, its meaning is ambiguous. Generally, a pilot will report LOC if the aircraft does not respond as expected. Consequently, pilot experience can be a major variable in assessing LOC. What LOC is to one pilot may not be to another. Recently, Wilborn and Foster<sup>3</sup> have proposed quantitative measures of LOC. These Quantitative Loss-of-Control (QLC) metrics consist of envelopes defined in two dimensional parameter spaces. Based on the analysis of 24 data sets compiled by the Commercial Aircraft Safety Team (CAST) Joint Safety Analysis Team (JSAT) for LOC<sup>7</sup> five envelopes have been defined:

1. *Adverse Aerodynamics Envelope*: (normalized) angle of attack vs. sideslip angle
2. *Unusual Attitude Envelope*: bank angle vs. pitch angle
3. *Structural Integrity Envelope*: normal load factor vs. normalized air speed
4. *Dynamic Pitch Control Envelope*: dynamic pitch attitude ( $\theta + \dot{\theta} \Delta t$ ) vs. % pitch control command
5. *Dynamic Roll Control Envelope*: dynamic roll attitude ( $\phi + \dot{\phi} \Delta t$ ) vs. % lateral control command

The authors provide a compelling discussion of why these envelopes are appropriate and useful. Flight trajectories from the 24 CAST data sets are plotted and the authors conclude maneuvers that exceed three or more envelopes can be classified as LOC, those that exceed two are borderline LOC and normal maneuvers rarely exceed one. According to Ref. 3, the precipitating events of the CAST LOC incidents were: stalls (45.8%), sideslip-induced rolls (25.0%), rolls from other causes (12.5%), pilot-induced oscillation (12.5%), and yaw (4.2%).

These results are important. They provide a means for analyzing accident data to establish whether or not the accident should be classified as LOC. Moreover, they help identify when the initial upset occurred, when control was lost and suggests which variables were involved. However, because the approach does not directly connect to the flight mechanics of the aircraft, it does not identify weaknesses or limitations in the aircraft or its control systems. Moreover, it does not explain how departures from controlled flight occur. In particular, we would like to know how environmental conditions or actuator failures or structural damage impact the vulnerability of the aircraft to LOC. To do this we need a formal analytical definition of LOC.

Another important study<sup>2</sup> reviews 74 transport LOC accidents in the fifteen year period 1993-2007. Of these the major underlying causes of LOC are identified as stalls, ice contaminated airfoils, spatial disorientation, and faulty recovery technique.

An aircraft must typically operate in multiple modes that have significantly different dynamics and control characteristics. For example, cruise and landing configurations. Within each mode there may be some parametric variation, such as weight or center of mass location, that also affects aircraft behavior. Each mode has associated with it a flight envelope restricting speed, attitude and other flight variables. Under normal conditions keeping within the flight envelope provides sufficient maneuverability to perform the mode mission while insuring structural integrity of the vehicle for all admissible parameter variations and

all anticipated disturbances. Abnormal conditions, e.g., icing, faults or damage, will alter aircraft dynamics and may require the definition of a new mode with its own flight envelope.

Ordinarily a flight envelope can be considered a convex polyhedral set, not necessarily bounded, in the state space. Thus, the aircraft needs to operate within the state constraints imposed by the envelope. Insuring that an aircraft remains within its flight envelope is called *envelope protection*. Envelope protection is generally the responsibility of the pilot although there is an increasing interest in and use of automatic protection systems.<sup>13–16</sup>

Because the controls themselves as well as the states are constrained, the question of whether it is even possible to keep the aircraft within the envelope is not trivial. Questions like this have been considered in the control literature.<sup>8,9,17–20</sup> In Section V below we discuss the problem of identifying the largest set within a prescribed envelope which can be made positively invariant and of characterizing the control strategy necessary to do so. This set will be called the *safe set*. It is possible to be inside of the envelope and yet outside of the safe set. In which case it is impossible, no matter how clever the pilot or the control system, to keep the aircraft within its flight envelope. In a strict sense departure from the safe set implies LOC. It may, of course, be possible to employ a recovery strategy to restore the system to the safe set. So an aircraft may be out of control and yet recoverable.

Besides the control bounds, other restrictions may be placed on the admissible controls that could further restrict the safe set. For instance, we could require that only smooth feedback controls be employed. These and related issues will be discussed below.

The prevalence of stalls in out of control incidents suggests the importance of bifurcation behavior as a factor in LOC. We discuss this further in Section IV.

### III. The Generic Transport Model

In the subsequent discussion we will frequently provide examples based on NASA’s Generic Transport Model (GTM). Data obtained from NASA have been used to develop symbolic and simulation models. Nonlinear symbolic models are used to perform bifurcation analysis and nonlinear control analysis and design. Linear Parameter Varying (LPV) models are derived from the nonlinear symbolic model and are used to study the variation in the structure of the linear system controllability properties around bifurcation points. Simulation models are also automatically assembled from the symbolic model in the form of optimized C-code that compiles as a MEX file for use as an S-function in Simulink.

The six degrees of freedom aircraft model has 12 or 13 states depending on whether we use Euler angles or quaternions. In the Euler angle case the state is given by  $x = [\phi, \theta, \psi, X, Y, Z, p, q, r, u, v, w]^T$ . There are 4 control inputs, given by  $u = [T, \delta_e, \delta_a, \delta_r]^T$ . The controls are limited as follows: thrust  $0 \leq T \leq 35.4372 \text{ lbf}$ , elevator  $-40^\circ \leq \delta_e \leq 20^\circ$ , aileron  $-20^\circ \leq \delta_a \leq 20^\circ$ , and rudder  $-30^\circ \leq \delta_r \leq 30^\circ$ . Velocity is in  $ft/s$ . The state space representation of the model is

$$\dot{x} = f(x, u, \mu)$$

where the vector  $\mu$  consists of certain distinguished parameters of the aircraft such as mass or center of mass location.

Aerodynamic models were obtained from NASA. They are based on data obtained with a 5.5 % scale model in the NASA Langley 14 ft  $\times$  22 ft wind tunnel as described in.<sup>11</sup> Aerodynamic force and moment coefficients are generated using a multivariate orthogonal function method as described in.<sup>21,22</sup> In the original NASA model several regions of angle of attack were used to capture severe nonlinearity. These models were blended using Gaussian weighting. For simplicity we use only one of the models for the analysis herein.

### IV. Bifurcation Analysis of Control Systems

Departures from controlled flight like stall and spin have concerned aircraft engineers from the earliest days of flight. In recent years departure has been analyzed by using a combination of simulation and flight test (with manned aircraft or scale models - see, for example, the informative report<sup>23</sup>). An example, that may be considered ‘state-of-the-art’ for studies of this type concerns the falling leaf and related behaviors of the F-18.<sup>24–26</sup> Only in the past two decades have formal methods of bifurcation analysis been applied to aircraft.<sup>4,27–36</sup> Bifurcation analysis has been employed to identify the conditions for occurrence of undesirable behaviors, to investigate recovery methods from dangerous post bifurcation modes and to formulate feedback

control systems that modify bifurcation behavior.

In this paper we consider the regulation of aircraft to a desired trim condition. In general the equations of motion of a rigid aircraft involve six degrees of freedom involving the six coordinates  $\phi, \theta, \psi, X, Y, Z$  and six (quasi-) velocities  $p, q, r, u, v, w$ . In the study of steady motions it is usual to ignore the inertial location  $(X, Y, Z)$  and consider only the velocities and attitude of the vehicle. The reduced dynamics comprise a nine dimensional system of state equation that are nonlinear and may be parameter dependent. We are concerned with steady motions that can be defined in terms of these variables. In particular, these motions are trajectories in the inertial  $(X, Y, Z)$  space, that can be associated with equilibria of the nine state system. We would like to know whether or not it is possible to regulate to and steer along these motions. Thus, we are naturally lead to the study of the existence and stabilizability of equilibria.

## A. Control issues at stall

Consider a parameter dependent, nonlinear control system given by

$$\begin{aligned}\dot{x} &= f(x, u, \mu) \\ z &= h(x, \mu)\end{aligned}\tag{1}$$

where  $x \in R^n$  are the states,  $u \in R^p$  are the control inputs,  $z \in R^r$  are the regulated variables and  $\mu \in R$  is any parameter. We assume that  $f, h$  are smooth (sufficiently differentiable). The parameter could be a physical variable like the weight of the aircraft or the center of gravity location; or a regulated variable like velocity, flight path angle, altitude or roll angle; or the position of a stuck control surface. The regulator problem is solvable only if  $p \geq r$ . Since the number of controls can always be reduced we henceforth assume  $p = r$ .

A triple  $(x^*, u^*, \mu^*)$  is an *equilibrium point* (or trim point) of (1) if

$$F(x^*, u^*, \mu^*) := \begin{pmatrix} f(x^*, u^*, \mu^*) \\ h(x^*, \mu^*) \end{pmatrix} = 0\tag{2}$$

The *equilibrium surface* is the set  $\mathcal{E} = \{(\mathbf{x}, \mathbf{u}, \mu) \in R^{n+m+k} \mid F(\mathbf{x}, \mathbf{u}, \mu) = 0\}$ .

**Definition 4.1** <sup>4</sup> An equilibrium point  $(x^*, u^*, \mu^*)$  is regular if there is a neighborhood of  $\mu^*$  on which there exist unique, continuously differentiable functions  $\bar{x}(\mu), \bar{u}(\mu)$  satisfying

$$F(\bar{x}(\mu), \bar{u}(\mu), \mu) = 0\tag{3}$$

If an equilibrium point is not a regular point it is a *static bifurcation point*. The Implicit Function Theorem implies that an equilibrium point is a bifurcation point only if  $\det J = 0$ . The Jacobian  $J$  is given by

$$J = [D_x F(x^*, u^*, \mu^*) \quad D_u F(x^*, u^*, \mu^*)]\tag{4}$$

Now, if  $A, B, C, D$  denotes the linearization at  $(x^*, u^*, \mu^*)$  of (1) with output  $z$  so that

$$J = \begin{bmatrix} A & B \\ C & 0 \end{bmatrix}$$

Then we have the following theorem for a static bifurcation point.

**Theorem 4.2** <sup>4</sup> An equilibrium point  $(x^*, u^*, \mu^*)$  is a static bifurcation point only if

$$\text{Im} \begin{pmatrix} A & B \\ C & 0 \end{pmatrix} \neq R^{n+r}\tag{5}$$

Recall that the system matrix is

$$P(\lambda) = \begin{pmatrix} \lambda I - A & B \\ -C & 0 \end{pmatrix}$$

From this observation, *necessary* conditions for a static bifurcation point can be obtained as follows:<sup>5</sup>

**Theorem 4.3** *The equilibrium point  $(x^*, u^*, \mu^*)$  is a static bifurcation point of (1) only if one of the following conditions is true for its linearization:*

1. *there is a transmission zero at the origin,*
2. *there is an uncontrollable mode with zero eigenvalue,*
3. *there is an unobservable mode with zero eigenvalue,*
4. *it has insufficient independent controls,*
5. *it has redundant regulated variables.*


The key implication of this theorem is that the ability to locally regulate the system diminishes as the bifurcation point is approached.<sup>6,37</sup> In fact a linear regulator (indeed a smooth feedback regulator) does not exist at the bifurcation point.<sup>4</sup> At the bifurcation point an arbitrarily small perturbation of parameters changes the zero structure of the system thereby requiring a fundamental change in the controller.<sup>6</sup> The point we wish to emphasize is that losing the capacity to regulate nonlinear flight dynamics is intimately connected to the bifurcation structure of the trim equations of the aircraft. Thus, at least some forms of LOC can be rigorously connected to the flight dynamics. This argument is also made very strongly in.<sup>33</sup>

## B. Uncontrolled departures near stall: GTM example


In this section our goal is to illustrate departures from controlled flight near stall bifurcation points.

We describe simulated GTM departures from a coordinated turn at various speeds near the stall speed. In each case the aircraft is trimmed very near a coordinated turn equilibrium condition. The controls are then fixed and the resultant trajectories are observed. Below we show results for three speeds – 90 ft/sec, 87 ft/sec, and 85 ft/sec. The last being very close to the stall speed. See Figure .1. The equilibrium surface was generated as a function of airspeed using a continuation method as described in.<sup>38</sup> One projection of this surface is shown in Figure .1 which shows elevator deflection  $\delta_e$  as a function of speed, the parameter  $V$ . The points selected for simulation are identified in the figure.

Figures .2 and .3 on the next page present a snapshot of the results. The former show the ground tracks and the latter display the aircraft attitude in terms of the Euler angles.

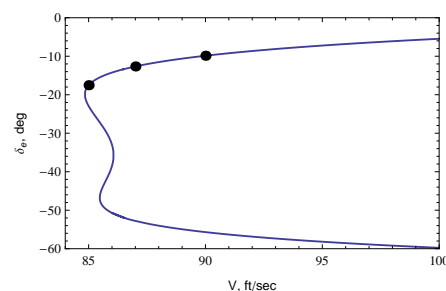

**Figure .1. A portion of the coordinated turn equilibrium surface shows elevator deflection as a function of speed.**

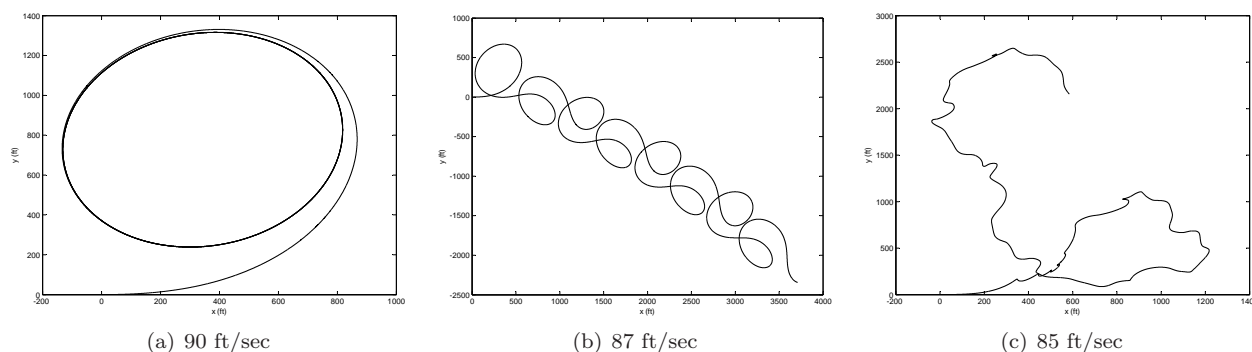

**Figure .2. Coordinated turn ground track. (a) at 90 ft/sec the the aircraft stabilizes in a coordinated turn. (b) at 87 ft/sec, closer to the stall speed, the aircraft departs from the coordinated turn and enters a periodic motion much like an extremely exaggerated Dutch roll. (c) at 85 ft/sec, approximately stall speed, the aircraft departs to an erratic motion, possibly chaotic.**

At 90 ft/sec the aircraft cleanly enters the coordinated turn. At 87 ft/sec, closer to stall speed, it departs from trim and within 20 seconds enters a well-formed, slowly descending, periodic motion with rather violent swings in attitude, particularly roll. At stall speed, 85 ft/sec, the vehicle departs from trim and enters a steeply descending, apparently chaotic motion with increasingly violent attitude swings. The simulation model utilizes a quaternion representation of attitude from which the Euler angles are computed. These are displayed in Figure .3.

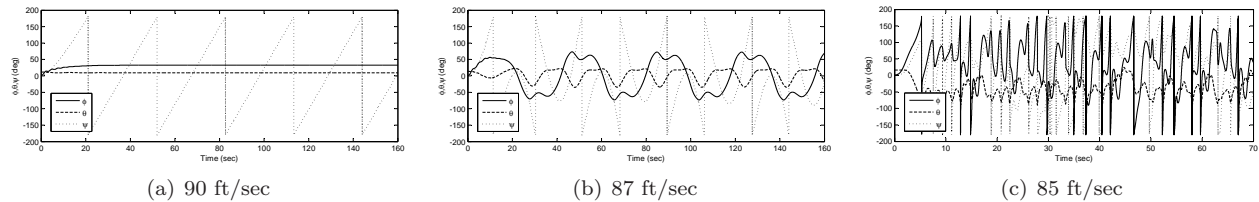


Figure .3. Coordinated turn attitude. (a) at 90 ft/sec the attitude stabilizes as expected. (b) at 87 ft/sec the aircraft enters a periodic trajectory. (c) at 85 ft/sec, approximately stall speed, the aircraft departs to an erratic motion.

As described in,<sup>3</sup> the angle of attack versus sideslip angle plot, i.e., the Adverse Aerodynamics Envelope, is a useful indicator of LOC. The simulation results are shown in Figure .4. We see the well contained data set for 90 ft/sec, and even for 87 ft/sec. However, the stall departure case, 85 ft/sec, suggests a serious control problem although this trajectory is obtained with fixed controls. This is consistent with the observations in Section A.


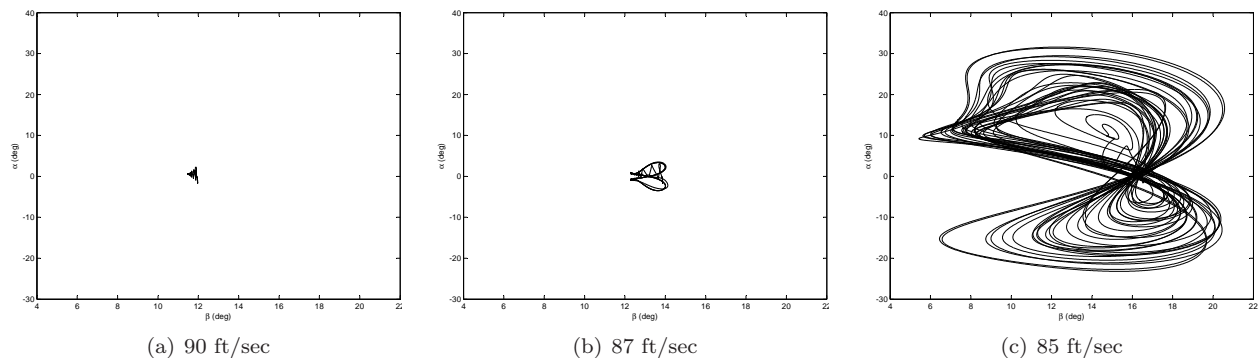


Figure .4. The adverse aerodynamics plot of the simulated trajectories suggests a serious control problem for the stall departure case (c).

### C. Control properties around the bifurcation point: GTM example

In accordance with Theorem 4.3 we anticipate some degeneracy in the linear system zero dynamics at the bifurcation point. To illustrate this we again consider the GTM, this time in a straight, wings level climb with flight path angle of 0.1 rad (5.7 deg). The equilibrium points are plotted as a function of speed in Figure .5. We first compute a parameter dependent family of linear systems (LPV model) using the method described in Ref 39. We construct a two-parameter family, the parameters being speed,  $V$ , and flight path angle,  $\gamma$ . The equilibrium surface approximation (and hence the LPV model) is third order in the parameters and generated at the bifurcation point shown in Figure .5 (a). The ‘other’ equilibria, shown in Figure .5 (b)

are obtained from the approximation and displayed in the figure with the true equilibrium curve. Analysis

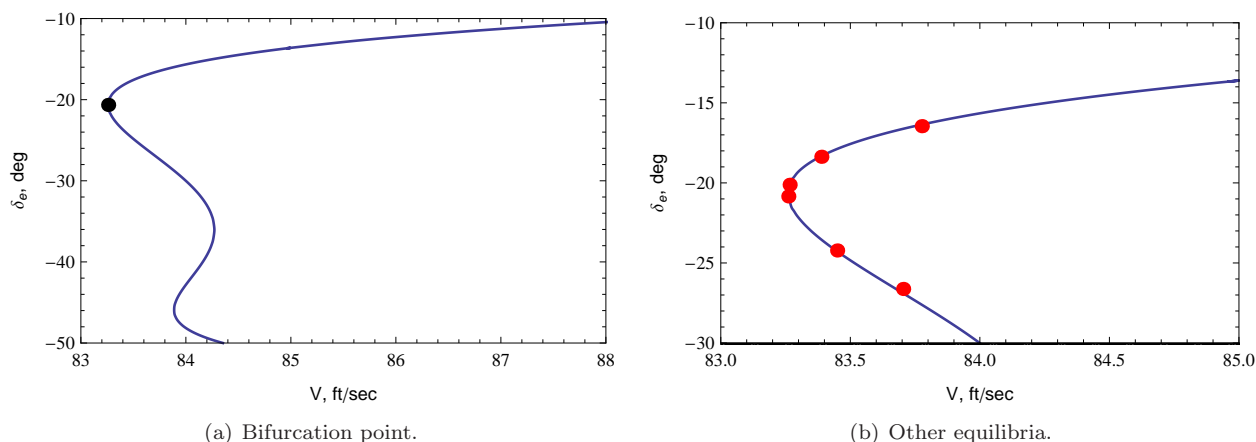

**Figure .5.** The equilibrium curve is shown for straight, wings level climb with speed as the parameter. The stall point is indicated in (a). A two parameter LPV model is derived around the bifurcation point with parameters speed and flight path angle. This involves deriving a polynomial approximation to the equilibrium surface around the bifurcation point (see<sup>39</sup>). In (b) several points are computed from the approximating surface are compared to the actual surface.

shows that the LPV system is uncontrollable at the bifurcation, but controllable at points arbitrarily near the bifurcation point. Furthermore, controllability degrades as the bifurcation point is approached. To see this we evaluate the controllability matrix at selected equilibrium points and compute its minimum singular value at each of the points shown in Figure .5. The results are shown in Table 1, with the bifurcation point shown in bold typeface. As explained in,<sup>39</sup> parameterization of the equilibrium manifold around singular points requires replacement of the physical parameters by suitable coordinates on the manifold. The variables  $s_1, s_2$  in Table 1 denote the coordinates used herein. Fixing  $s_2 = 0$  and varying  $s_1$  produces a slice through the surface corresponding to fixed  $\gamma$  and varying  $V$ .

**Table 1. Degree of Controllability**

$s_1$	$s_2$	$V$	$\delta_e$	$\sigma_{min}$
0.010000	0.00	83.7759	-16.4569	0.00186924
0.005000	0.00	83.3882	-18.3686	0.00098419
0.001000	0.00	83.2658	-20.1175	0.00022455
<b>-0.000104</b>	<b>0.00</b>	<b>83.2599</b>	<b>-20.6466</b>	<b>0.00000000</b>
-0.000500	0.00	83.2607	-20.8418	0.00008107
-0.006500	0.00	83.4491	-24.2201	0.00153969
-0.010000	0.00	83.7040	-26.6229	0.00276331

We note that even though the system fails to be linearly controllable at the bifurcation point it is locally (nonlinearly) controllable in the sense that the controllability distribution has full generic rank around the bifurcation point. The implication is that any stabilizing feedback controller would certainly be nonlinear and probably nonsmooth.



## D. Remarks on recovery from stall

The GTM appears to be remarkably stable. In the coordinated turn illustrated above, the stall speed is about 85 ft/sec. With the controls fixed at their stall equilibrium values the aircraft enters a spin and dives. After several seconds into the spin we reset the controls to their stable 90 ft/sec values. Figure .6 shows the recovery when the controls are reset after 10 seconds. This was intended as an experiment to determine if the vehicle dynamics would permit recovery. No assessment was made as to whether this is an acceptable strategy. In particular we did not evaluate structural integrity although it appears that peak acceleration is less than 2 g's. The vehicle drops about 1400 feet. It is worth noting that the simulations show that

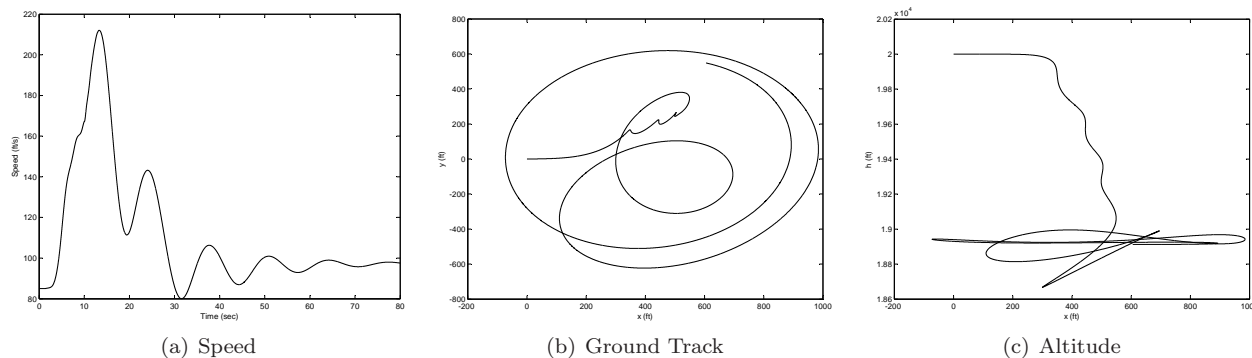


Figure .6. Coordinated turn recovery from stall. The vehicle stalls at about 85 ft/sec during a coordinated turn. After 10 seconds the controls are reset to the 90 ft/sec values. (a) The speed peaks at about 215 ft/sec 13 sec after stall before stabilizing at 90 ft/sec. (b) The ground track follows the pattern of Figure .2 until the controls are reset. Then it stabilizes into the turn. (c) The aircraft drops about 1400 ft. during the recovery.

recovery can take place even further into the spin. Of course, with significantly greater loss of altitude.

## V. Constrained Dynamics

The safe operation of an aircraft requires that certain key variables remain within specified limits. Complicating this is the fact that aircraft are continuously subjected to disturbances and the control responses are also strictly constrained by actuator limits. The control of systems with state and control constraints is a fundamental problem in control theory that has a substantial literature going back decades, e.g.<sup>40,41</sup> In the following paragraphs we consider how some of this work contributes to our understanding of LOC.

### A. Control with state and control constraints

All commercial aircraft are required to respect specified flight envelope restrictions. For example in normal (unimpaired) flight a typical aircraft will have: load factor limitations and also attitude (pitch and roll) and speed limitations. Indeed most aircraft employ envelope protection controllers. The protective actions taken can range from reshaping pilot commands to taking over control until the aircraft is restored to within the desired envelope. These systems present transition issues just like any other switching system. While there is no comprehensive theory of envelope protection, it has been addressed in the literature, for example.<sup>14,15,42</sup> An important factor in these controllers is that the control responses are limited. For example, control surfaces have a restricted range of motion and are limited in the control forces that can be generated by them.

Consider a controlled dynamical system

$$\dot{x} = f(x, u), \quad x \in R^n, u \in U \subset R^m \quad (6)$$

where the set  $U$  is closed, bounded and convex. Also, suppose the desired envelope is a convex, not necessarily bounded, subset  $\mathcal{C}$  of the state space  $R^n$ . Feuer and Heyman<sup>41</sup> study the general control problem

of interest to us. Specifically, under what conditions does there exist for each  $x_0 \in \mathcal{C}$  a control  $u(t) \subset U$  and a corresponding unique solution  $x(t; x_0, u)$  that remains in  $\mathcal{C}$  for all  $t > 0$ ? While some basic results are provided in,<sup>41</sup> the general case is unresolved. Concrete results have subsequently been obtained for special cases. Especially for linear dynamics with polyhedral constraint sets.<sup>8,9,17–20,40,43</sup> In the following paragraphs we apply some of the more recent results.

## B. The safe set

There are two fundamental issues that need to be addressed: Is it possible to remain within a specified subset of the state space?, and, If so, what control actions are required to insure the aircraft remains within it? These questions have been raised in the literature, for example.<sup>8,9,43</sup>

Furthermore, suppose that  $\mathcal{C}$  is defined by

$$\mathcal{C} = \{x \in R^n \mid l(x) > 0\} \quad (7)$$

where  $l : R^n \rightarrow R$  is continuous. The boundary of  $\mathcal{C}$  is the zero level set of  $l$ , i.e.,  $\partial\mathcal{C} = \{x \in R^n \mid l(x) = 0\}$ . The safe set is defined as the largest positively control-invariant set contained in  $\mathcal{C}$ . Several investigators have considered the computation of the safe set, the most compelling of which involve solving the Hamilton-Jacobi equation. We describe one of several variants; this one due to Lygeros.<sup>9</sup>

Suppose that we are concerned with the operation of the system (6) over a time interval  $[0, T]$  for some fixed terminal time  $0 < T < \infty$ . The safe set is defined for each  $t \in [0, T]$  as the set of points  $x$  for which there exists at least one control  $u$  on the interval  $[t, T]$  such that the trajectory emanating from  $x$  remains in  $\mathcal{C}$  until the terminal time:

$$\mathcal{S}(t, \mathcal{C}) = \{x \in R^n \mid \exists u(\tau) \subset U, \forall \tau \in [t, T] : \phi(\tau; x(t), u(\tau)) \subset \mathcal{C}\} \quad (8)$$

The main result in [9] is the following. Suppose  $V(x, t)$  is a viscosity (or, weak) solution of the terminal value problem

$$\frac{\partial V}{\partial t} + \min \left\{ 0, \sup_{u \in U} \frac{\partial V}{\partial x} f(x, u) \right\} = 0, \quad V(x, T) = l(x) \quad (9)$$

then

$$\mathcal{S}(t, \mathcal{C}) = \{x \in R^n \mid V(x, t) > 0\} \quad (10)$$

The function  $V(x, t)$  is in fact the 'cost-to-go' associated with an optimal control problem in which the goal is to choose  $u(t)$  so as to maximize the minimum value of  $l(x(t))$ . The function  $V(x, t)$  inherits some nice properties from this fact. For instance it is bounded and uniformly continuous. Define the Hamiltonian

$$H(p, x) = \min \left\{ 0, \sup_{u \in U} p^T f(x, u) \right\} \quad (11)$$

$$\frac{\partial V}{\partial t} + H\left(\frac{\partial V}{\partial x}, x\right) = 0, \quad V(x, T) = l(x) \quad (12)$$

$V(x, t)$  is the unique, bounded and uniformly continuous solution of (9) or (12). Notice that the control obtained in computing the Hamiltonian (11) insures that when applied to each state along any trajectory initially inside of  $\mathcal{S}$  the resulting trajectory will remain in  $\mathcal{S}$ . It follows that this control should be applied for states on its boundary to insure that the trajectory does not leave  $\mathcal{S}$ .

The envelope defined by (7) can be generalized to an envelope with piecewise continuous boundary. For example, suppose the envelope is defined by

$$\mathcal{C} = \{x \in R^n \mid l_i(x) > 0, i = 1, \dots, K\} \quad (13)$$

Where each of the  $l_i(x)$  are continuous functions. Then we need to solve  $K$  problems with

$$\mathcal{C}_j = \{x \in R^n \mid l_j(x) > 0\}, \quad j = 1, \dots, K$$

to obtain the largest control invariant set in each  $\mathcal{C}_j$  and then take their intersection. There are many physical problems in which the tracking of moving boundaries separating to regions of space are important. So it is not surprising that the numerical computation of propagating surfaces is a mature field. The most powerful methods exploit the connection with the Hamilton-Jacobi equation and associated conservation laws; see the survey [44].

### C. Computing the safe set: the GTM example

The longitudinal dynamics of a rigid aircraft can be written in path coordinates:

$$\begin{aligned}
\dot{\theta} &= q \\
\dot{x} &= V \cos \gamma \\
\dot{z} &= V \sin \gamma \\
\dot{V} &= \frac{1}{m} (T \cos \alpha - \frac{1}{2} \rho V^2 S C_D (\alpha, \delta_e, q) - mg \sin \gamma) \\
\dot{\gamma} &= \frac{1}{mV} (T \sin \alpha + \frac{1}{2} \rho V^2 S C_L (\alpha, \delta_e, q) - mg \cos \gamma) \\
\dot{q} &= \frac{M}{I_y}, \quad M = (\frac{1}{2} \rho V^2 S \bar{c} C_m (\alpha, \delta_e, q) + \frac{1}{2} \rho V^2 S \bar{c} C_z (\alpha, \delta_e, q) (x_{cgreff} - x_{cg}) - mg x_{cg} + l_t T) \\
\alpha &= \theta - \gamma
\end{aligned} \tag{14}$$

A classic analysis problem of aeronautics was introduced by Lanchester<sup>45</sup> over one hundred years ago – the long period *phugoid* motion of an aircraft in longitudinal flight. The phugoid motion is a roughly constant angle of attack behavior involving an oscillatory pitching motion with out of phase variation of altitude and speed. The ability to stabilize the phugoid motion using the elevator or thrust is important. The inability to do so has been linked to a number of fatal airline accidents including Japan Airlines Flight 123 in 1985 and United Airlines Flight 232 in 1989.<sup>46</sup>

We will illustrate the safe set computations by examining the controlled phugoid dynamics of the GTM. The problem is similar to one considered in [9, 43] The key assumption is that pitch rate rapidly approaches zero so that the the phugoid motion is characterized by  $q \equiv 0$ . Thus, we must have

$$M = (\frac{1}{2} \rho V^2 S \bar{c} C_m (\alpha, \delta_e, q) + \frac{1}{2} \rho V^2 S \bar{c} C_z (\alpha, \delta_e, q) (x_{cgreff} - x_{cg}) - mg x_{cg} + l_t T) = 0 \tag{15}$$

From (15) we obtain a quasi-static approximation for the angle of attack

$$\alpha = \hat{\alpha} (V, T, \delta_e) \tag{16}$$

so that the  $V - \gamma$  equations in (14) decouple from the remaining equations. Thus, we have a closed system of two differential equations that define the phugoid dynamics:

$$\begin{aligned}
\dot{V} &= \frac{1}{m} (T \cos \hat{\alpha} - \frac{1}{2} \rho V^2 S C_D (\hat{\alpha}, \delta_e, 0) - mg \sin \gamma) \\
\dot{\gamma} &= \frac{1}{mV} (T \sin \hat{\alpha} + \frac{1}{2} \rho V^2 S C_L (\hat{\alpha}, \delta_e, 0) - mg \cos \gamma)
\end{aligned} \tag{17}$$

We specify an operating envelope

$$\mathcal{C} = \{(V, \gamma) | 90 \leq V \leq 240, -22 \leq \gamma \leq 22\}$$

and control restraint set

$$U = \{(T, \delta_e) | 0 \leq T \leq 30, -40 \leq \delta_e \leq 20\}$$

Figure .7 shows the safe set,  $\mathcal{S}$ . The points in  $\mathcal{C} \setminus \mathcal{S}$  produce trajectories that exit the envelope. The difficulty is that at these low speeds it is not possible to generate enough lift to prevent the aircraft from descending along an unacceptable flight path angle. The trajectory illustrated has maximum thrust and maximum elevator deflection. These are the controls that maximize  $\dot{\gamma}$ . Yet the flight path angle  $\gamma$  drops below the minimum threshold thereby the trajectory departs the envelope  $\mathcal{C}$ .

## VI. Conclusions

In this paper we give new insights into LOC based on the control analysis of the flight dynamics. We show how the controllability properties of the aircraft diminish near critical points of the trim equations – i.e., stall. Our results show that when operating near stall control properties can change fundamentally with small changes in the aircraft state. Thus a small disturbance can cause a dramatic change in how an aircraft responds to pilot inputs. The analysis is applied to the GTM model in a nominal configuration. The method can be easily applied to systems in non-normal situations, especially those that can be modeled with parameter variation, such as aft center of mass<sup>4</sup> or icing. Preliminary results suggest that an unimpaired GTM-like aircraft may be recoverable from post stall departures with relatively simple strategies.

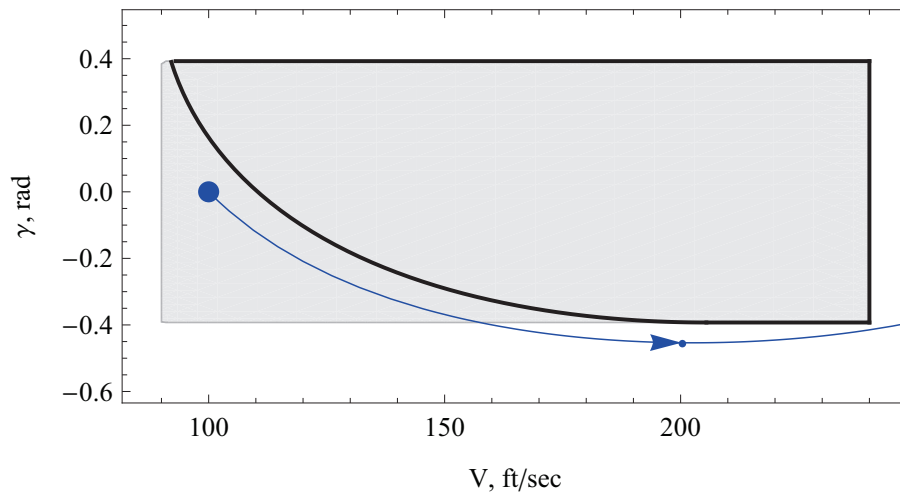


Figure .7. The original envelope is the shaded region. The safe set is the region enclosed within the black boundary. Trajectories beginning in the excluded region, i.e., the lower left corner of the envelope, escape the envelope by crossing its lower boundary even with the most propitious controls.

Departure from the prescribed flight envelope is one aspect of LOC. We consider safe set analysis which is an important first step in addressing envelope protection. Roughly speaking the safe set is the largest set within a prescribed envelope that can be made positively invariant. In general, the safe set is smaller than the envelope and it is therefore necessary to apply protection to the safe set boundaries. We give an illustration of safe set computation using the GTM phugoid dynamics.

## Dedication

This paper is dedicated to Dr. Celeste Belcastro whose enthusiasm for this work and contributions to its formative ideas remains an inspiration to all of us.

## Acknowledgement

This research was supported by the National Aeronautics and Space Administration under Contract number NNX09CE93P.

## References

- <sup>1</sup>Ranter, H., "Airliner Accident Statistics 2006," Tech. rep., Aviation Safety Network, 2007.
- <sup>2</sup>Lambregts, A. A., Nesemeier, G., Wilborn, J. E., and Newman, R. E., "Airplane Upsets: Old Problem, New Issues," *AIAA Modeling and Simulation Technologies Conference and Exhibit*, AIAA, Honolulu, Hawaii, 2008.
- <sup>3</sup>Wilborn, J. E. and Foster, J. V., "Defining Commercial Aircraft Loss-of-Control: a Quantitative Approach," *AIAA Atmospheric Flight mechanics Conference and Exhibit*, AIAA, Providence, Rhode Island, 16-19 August 2004.
- <sup>4</sup>Kwatny, H. G., Bennett, W. H., and Berg, J. M., "Regulation of Relaxed Stability Aircraft," *IEEE Transactions on Automatic Control*, Vol. AC-36, No. 11, 1991, pp. 1325–1323.
- <sup>5</sup>Kwatny, H. G., Chang, B. C., and Wang, S. P., "Static Bifurcation in Mechanical Control Systems," *Chaos and Bifurcation Control: Theory and Applications*, edited by G. Chen, Springer-Verlag, 2003.
- <sup>6</sup>Berg, J. M. and Kwatny, H. G., "Unfolding the Zero Structure of a Linear Control System," *Linear Algebra and its Applications*, Vol. 235, 1997, pp. 19–39.
- <sup>7</sup>Russell, P. and Pardee, J., "Final Report: JSAT Loss of Control: Results and Analysis," Tech. rep., Federal Aviation Administration: Commercial Airline Safety Team, 2000.
- <sup>8</sup>Oishi, M., Mitchell, I. M., Tomlin, C., and Saint-Pierre, P., "Computing Viable Sets and Reachable Sets to Design Feedback Linearizing Control Laws Under Saturation," *45th IEEE Conference on Decision and Control*, IEEE, San Diego, 2006, pp. 3801–3807.
- <sup>9</sup>Lygeros, J., "On Reachability and Minimum Cost Optimal Control," *Automatica*, Vol. 40, 2004, pp. 917–927.
- <sup>10</sup>Foster, J. V., Cunningham, K., Fremaux, C. M., Shah, G. H., Stewart, E. C., Rivers, R. A., Wilborn, J. E., and Gato,

W., "Dynamics Modeling and Simulation of Large Transport Aircraft in Upset Conditions," *AIAA Guidance, Navigation, and Control Conference and Exhibit*, San Francisco, CA, 15-18 August 2005.

<sup>11</sup>Murch, A. M. and Foster, J. V., "Recent NASA Research on Aerodynamic Modeling of Post-Stall and Spin Dynamics of Large Transport Aircraft," 8-11 January 2007.

<sup>12</sup>Jordan, T., Langford, W., Belcastro, C., Foster, J., Shah, G., Howland, G., and Kidd, R., "Development of a Dynamically Scaled Generic Transport Model Testbed for Flight Research Experiments," *AUVSI Unmanned Unlimited*, Arlington, VA, 2004.

<sup>13</sup>Hossain, K. N., Sharma, V., Bragg, M. B., and Voulgaris, P. G., "Envelope Protection and Control Adaptation in Icing Encounters," *41st AIAA Aerospace Sciences Meeting and Exhibit*, Reno, Nevada, 6-9 January 2003.

<sup>14</sup>Unnikrishnan, S. and Prasad, J. V. R., "Carefree Handling Using Reactionary Envelope Protection Method," *AIAA Guidance, Navigation and Control Conference and Exhibit*, Keystone, CO, 21-24 August 2006.

<sup>15</sup>Well, K. H., "Aircraft Control Laws for Envelope Protection," *AIAA Guidance, Navigation and Control Conference*, Keystone, Colorado, 21-24 August 2006.

<sup>16</sup>[www.airbusdriver.net/airbus.ftl.laws.htm](http://www.airbusdriver.net/airbus.ftl.laws.htm).

<sup>17</sup>Blanchini, F., "Feedback Control for Linear Time-Invariant Systems with State and Control Bounds in the Presence of Uncertainty," *IEEE Transactions on Automatic Control*, Vol. 35, No. 11, 1990, pp. 1231 – 1234.

<sup>18</sup>Bitsoris, G. and Vassilaki, M., "Constrained Regulation of Linear Systems," *Automatica*, Vol. 31, No. 2, 1995, pp. 223–227.

<sup>19</sup>Bitsoris, G. and Gravalou, E., "Comparison Principle, Positive Invariance and constrained regulation of Nonlinear Systems," *Automatica*, Vol. 31, No. 2, 1995, pp. 217–222.

<sup>20</sup>ten Dam, A. A. and Nieuwenhuis, J. W., "A Linear programming Algorithm for Invariant Polyhedral Sets of Discrete-Time Linear Systems," *Systems and control Letters*, Vol. 25, 1995, pp. 337–341.

<sup>21</sup>Morelli, E. A., "Global Nonlinear Aerodynamic Modeling Using Multivariate Orthogonal Functions," *Journal of Aircraft*, Vol. 32, No. 2, 1995, pp. 270–277.

<sup>22</sup>Morelli, E. A. and DeLoach, R., "Wind Tunnel Database Development using Modern Experiment Design and Multivariate Orthogonal Functions," *41st AIAA Aerospace Sciences Meeting and Exhibit*, AIAA Paper 2003-0653, Reno, NV, January 2003.

<sup>23</sup>Holleman, E. C., "Summary of Flight Tests to Determine the Spin and Controllability Characteristics of a Remotely Piloted, Large-Scale (3/8) Fighter Airplane Model," Tech. Rep. NASA TN D-8052, NASA Flight Research Center, January, 1976 1976.

<sup>24</sup>Jaramillo, P. and Ralston, J., "Simulation of the F/A-18D "Falling Leaf"," *AIAA Atmospheric Flight Mechanics Conference*, San Diego, July 28-30 1996.

<sup>25</sup>Jaramillo, P., "An Analysis of Falling leaf Suppression Strategies for the F/A-18D," *AIAA Atmospheric Flight Mechanics Conference*, San Diego, July 29-30 1996.

<sup>26</sup>Croom, M., Kenney, H., Murri, D., and Lawson, K., "Research on the F/A-18E/F Using a 22Flight Mechanics Conference", Denver, 2000.

<sup>27</sup>Young, J., Schy, A., and Johnson, K., "Prediction of Jump Phenomena in Aircraft Maneuvers Including Nonlinear Aerodynamics Effects," *Journal of Guidance and Control*, Vol. 1, No. 1, 1978, pp. 26–31.

<sup>28</sup>Carrol, J. V. and Mehra, R. K., "Bifurcation of Nonlinear Aircraft Analysis," *Journal of Guidance, Control and Dynamics*, Vol. 5, No. 5, 1982, pp. 529–536.

<sup>29</sup>Guicheteau, P., "Bifurcation Theory Applied to the Study of Control Losses on Combat Aircraft," *Recherche Aerospatiale*, Vol. 2, 1982, pp. 61–73.

<sup>30</sup>Hui, W. H. and Tobak, M., "Bifurcation Analysis of Aircraft Pitching Motions at High Angles of Attack," *Journal of Guidance and Control*, Vol. 7, 1984, pp. 106–113.

<sup>31</sup>Namachivaya, N. S. and Ariaratnam, S., "Nonlinear Stability Analysis of Aircraft at High Angles of Attack," *International Journal of Nonlinear Mechanics*, Vol. 21, No. 3, 1986, pp. 217–228.

<sup>32</sup>Jahnke, C. C. and Culick, F. E. C., "Application of Bifurcation Theory to High Angle of Attack Dynamics of the F-14 Aircraft," *Journal of Aircraft*, Vol. 31, No. 1, 1994, pp. 26–34.

<sup>33</sup>Goman, M. G., Zagainov, G. I., and Khramtsovsky, A. V., "Application of Bifurcation Methods to Nonlinear Flight Dynamics Problems," *Progress in Aerospace Science*, Vol. 33, 1997, pp. 539–586.

<sup>34</sup>Charles, G. A., Lowenberg, M. H., Wang, X. F., Stoten, D. P., and Bernardo, M. D., "Feedback Stabilised Bifurcation Tailoring Applied to Aircraft Models," *International Council of the Aeronautical Sciences 2002 Congress*, 2002, pp. 531.1–531.11.

<sup>35</sup>Lowenberg, M. H., "Bifurcation Analysis of Multiple-Attractor Flight Dynamics," *Philosophical Transactions: Mathematical, Physical and Engineering Sciences*, Vol. 356, No. 1745, 1998, pp. 2297–2319.

<sup>36</sup>Lowenberg, M. H. and Richardson, T. S., "The Continuation Design Framework for Nonlinear Aircraft Control," *AIAA Atmospheric Flight Mechanics Conference*, 2001.

<sup>37</sup>Berg, J. and Kwatny, H. G., "An Upper Bound on the Structurally Stable Regulation of a Parameterized Family of Nonlinear Control Systems," *Systems and Control Letters*, Vol. 23, 1994, pp. 85–95.

<sup>38</sup>Bajpai, G., Beytin, A., Thomas, S., Yasar, M., Kwatny, H. G., and Chang, B. C., "Nonlinear Modeling and Analysis Software for Control Upset Prevention and Recovery of Aircraft," *AIAA Guidance, Navigation and Control Conference*, AIAA, Honolulu, Hawaii, 18-21 August 2008.

<sup>39</sup>Kwatny, H. G. and Chang, B. C., "Constructing Linear Families from Parameter-Dependent Nonlinear Dynamics," *IEEE Transactions on Automatic Control*, Vol. 43, No. 8, 1998, pp. 1143–1147.

<sup>40</sup>Glover, J. D. and Schweppe, F. C., "Control of Linear Systems with Set Constrained Disturbances," *IEEE Transactions on Automatic Control*, Vol. 16, No. 5, 1971, pp. 411–423.

<sup>41</sup>Feuer, A. and Heymann, M., " $\Omega$ -Invariance in Control Systems with Bounded Controls," *Journal of mathematical Analysis and Applications*, Vol. 53, 1976, pp. 26–276.

<sup>42</sup>Tomlin, C., Lygeros, J., and Sastry, S., “Aerodynamic Envelope Protection using Hybrid Control,” *American Control Conference*, Philadelphia, 1998, pp. 1793–1796.

<sup>43</sup>Lygeros, J., Tomlin, C., and Sastry, S., “Controllers for reachability specifications for hybrid systems,” *Automatica*, Vol. 35, No. 3, 1999, pp. 349–370.

<sup>44</sup>Sethian, J. A., “Evolution, Implementation, and Application of Level Set and Fast Marching Methods for Advancing Fronts,” *Journal of Computational Physics*, Vol. 169, 2001, pp. 503–555.

<sup>45</sup>Lanchester, F. W., *Aerodnetics*, Constable and Company, London, 1908.

<sup>46</sup>Anonymous, “Aircraft Accident Report – United Airlines Flight 232,” Tech. Rep. NTSB/AAR-90/06, National Transportation Safety Board, 1990.